

SPECIFICATION

Brass FIP Ball Valve

Description

Lead Free Brass Ball Valve

Product Features:

- Two-Piece Body with Full Port, Blowout-Proof Stem, and PTFE Seats.
- Opening: 90° Rotation with Mechanical Stop
- Lever Handle: White




Product Specifications:

- Temperature Range: 0°F to 200°F
- 1/2" to 1-1/2" 600 CWP
- 250 PSI Non-Shock CWP (1/2" - 2")
- FNPT Size: 1/2" to 1-1/2"
- IAPMO Listed to cUPC, NSF/ANSI 61 & NSF/ANSI 372
- CSA Listed
- Conforms to MSS SP-110

No.	Part	Material
1	Body	Lead Free Brass
2	Bonnet	Lead Free Brass
3	Ball Seat	PTFE
4	Ball	SS304
5	Stem	Brass
6	Stem Packing	PTFE
7	Packing Nut	Brass
8	Handle	Steel
9	Locknut	Steel

* Lead Free: weighted average lead content $\leq 0.25\%$

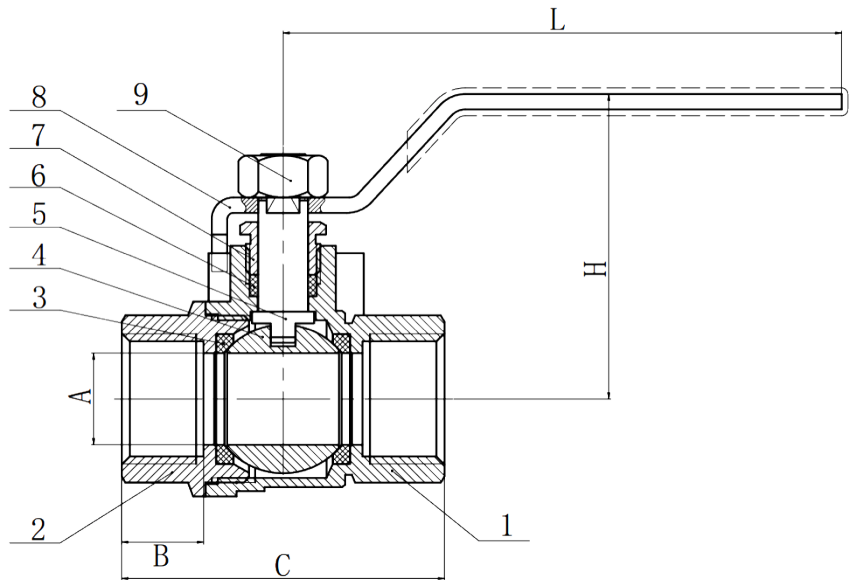

Dimensions:

Model#	Size	A	B	C	H	L
12BRFIPBVLFF	1/2"	0.58"	0.52"	2.05"	1.94"	3.54"
34BRFIPBVLFF	3/4"	0.75"	0.56"	2.36"	2.11"	3.78"
1BRFIPBVLFF	1"	0.94"	0.63"	2.76"	2.58"	4.53"
114BRFIPBVLFF	1-1/4"	1.26"	0.71"	3.31"	2.96"	4.53"
112BRFIPBVLFF	1-1/2"	1.57"	0.72"	3.66"	3.37"	5.51"

SPECIFICATION

Brass PEX Ball Valve

Description

Lead Free Brass Ball Valve

Product Features:


- Two-Piece Body with PTFE Seats
- Opening: 90° Rotation with Mechanical Stop
- Lever Handle: White

Product Specifications:

- Pressure Rating: 400 WOG
- Temperature Range: 0°F to 200°F
- PEX Barb: ASTM F1960
- IAPMO Listed to cUPC, NSF/ANSI 61 & NSF/ANSI 372 (Lead-Free)
- Sizes: 1/2" & 3/4"



No.	Part	Material
1	Body	Lead Free Brass
2	Bonnet	Lead Free Brass
3	Ball Seat	PTFE
4	Ball	1/2" Brass
		3/4" SS304
5	Stem	Brass
6	O-Ring	DPEM
7	Handle	Steel
8	Locknut	Steel
9	Rubber Seat	LDPE

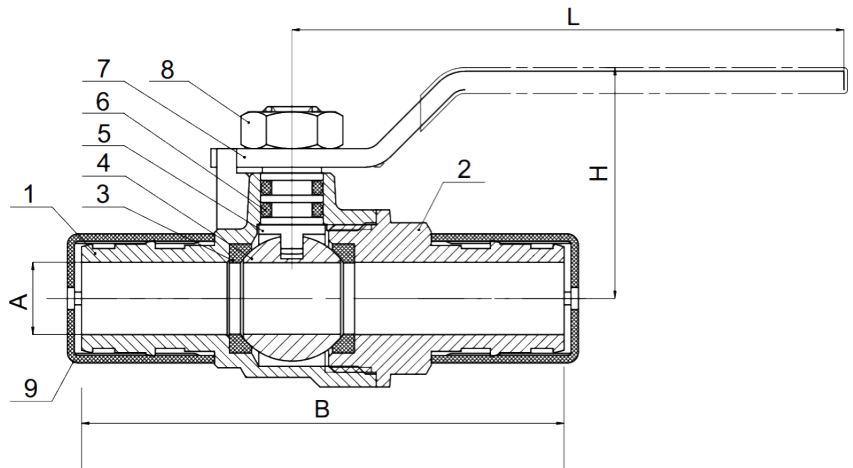

* Lead Free: weighted average lead content $\leq 0.25\%$

Dimensions:

Model#	Size	A	B	H	L
12BRPPXBVLF	1/2"	0.39"	2.95"	1.23"	2.60"
34BRPPXBVLF	3/4"	0.60"	3.26"	1.37"	2.97"