

SPECIFICATION

Flexible Transition Coupling


Product Features:

- Leak proof
- Resistant to chemicals and ultraviolet rays
- Stainless steel 300 grade hose clamps are corrosion resistant
- Quickly and easily to connects pipes of same or different sizes and materials
- Conforms to ASTM C1173 and CSA B602
- IAPMO listed

Tech Specs:

- Installation torque: 60 in-lbs. max
- Maximum test pressure: 4.3 PSI (29.6KPA)
- Maximum operating temperature: 140°F non-consistent
- Minimum operating temperature: -30°F

Dimensions:

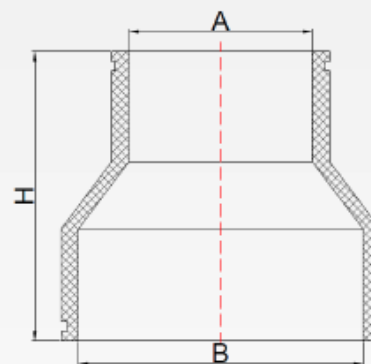

Model#	Description	Dimensions		
		A	B	H
Cast Iron, Plastic to Cast Iron, Plastic				
1731-6075	3/4" CI/PL X 3/4"CI/PL FLX CPLG	1.06"	1.06"	2.36"
1731-6100	1" CI/PL X 1"CI/PL FLX CPLG	1.30"	1.30"	2.40"
1731-6125	1-1/4" CI/PL X 1-1/4"CI/PL FLX CPLG	1.57"	1.57"	3.46"
1731-6150	1-1/2" CI/PL X 1-1/2"CI/PL FLX CPLG	1.93"	1.93"	3.46"
1731-622	2" CI/PL X 2"CI/PL FLX CPLG	2.40"	2.40"	3.46"
1731-633	3" CI/PL X 3"CI/PL FLX CPLG	3.50"	3.50"	3.98"
1731-644	4" CI/PL X 4"CI/PL FLX CPLG	4.53"	4.53"	3.98"
1731-655	5" CI/PL X 5"CI/PL FLX CPLG	5.67"	5.67"	3.98"
1731-666	6" CI/PL X 6"CI/PL FLX CPLG	6.54"	6.54"	5.91"
1731-688	8" CI/PL X 8"CI/PL FLX CPLG	8.58"	8.58"	6.02"
1731-61010	10" CI/PL X 10"CI/PL FLX CPLG	10.63"	10.63"	5.98"
1731-6150125	1-1/2" CI/PL X 1-1/4"CI/PL FLX CPLG	1.65"	1.89"	3.46"
1731-6215	2" CI/PL X 1-1/2"CI/PL FLX CPLG	1.89"	2.40"	3.43"
1731-6315	3" CI/PL X 1-1/2"CI/PL FLX CPLG	1.97"	3.46"	4.02"
1731-632	3" CI/PL X 2"CI/PL FLX CPLG	2.36"	3.50"	3.98"
1731-642	4" CI/PL X 2"CI/PL FLX CPLG	2.36"	4.53"	4.10"
1731-643	4" CI/PL X 3"CI/PL FLX CPLG	3.46"	4.53"	3.90"
1731-654	5" CI/PL X 4"CI/PL FLX CPLG	4.49"	5.63"	3.94"
1731-664	6" CI/PL X 4"CI/PL FLX CPLG	4.45"	6.46"	5.87"
1731-686	8" CI/PL X 6"CI/PL FLX CPLG	6.50"	8.54"	5.67"

SPECIFICATION

Flexible Transition Coupling

Dimensions:

Model#	Description		Dlmentslons		
			A	B	H
Clay to Cast Iron, Plastic					
1731-B44	4" CL X 4"CI/PL FLX CPLG		4.41"	5.16"	3.98"
1731-B64	6" CL X 4"CI/PL FLX CPLG		4.49"	7.32"	5.83"
1731-B66	6" CL X 6"CI/PL FLX CPLG		6.61"	7.36"	5.98"
1731-B88	8" CL X 8"CI/PL FLX CPLG		8.46"	9.57"	6.10"
Asbestos Cement, Ductile Iron to Cast Iron, Plastic					
1731-C44	4" AC/DI X 4"CI/PL FLX CPLG		4.49"	4.80"	3.98"